


STELLAR



- Luz multi-punto; no genera sombras
- Hasta 80,000 horas de vida útil
- No requiere balastro
- Temperatura de color:
3000K, 4000K, 5000K, 6500K
- Base E40
- Compatibilidad Electromagnética (CEM)
Norma UNE-EN 61000-4-12:2007



MODELO	POTENCIA	FLUJO LUMINOSO
STELLAR-100	100 watts	9,700 lm
STELLAR-120	120 watts	11,640 lm
STELLAR-150	150 watts	14,550 lm
STELLAR-180	180 watts	17,460 lm
STELLAR-200	200 watts	19,400 lm

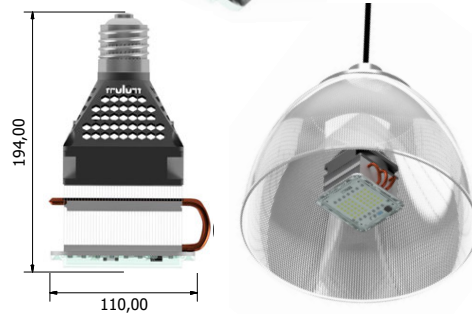

Rango de Operación	120/220/277 Vca
Tolerancia	± 20%
Índice Cromático	> 85
Factor de Potencia	> 0.93
Grado de Protección	IP65

KHATOD[®]
Optical Solutions for LED Lighting

